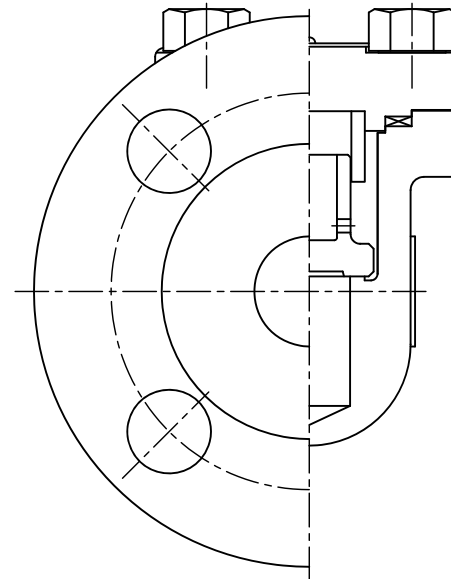


[illegible]

1. VALVE DESIGN: API 602
2. END CONNECTION: ASME B16.10, ASME B16.5
3. HYDROSTATIC TEST (API 598)
Shell: 30 Bar
Seat: 22 Bar

SIZE		L ±1.5	H	ØA	ØC	hxn	Øg	f	t	Ød	Ød1		WEIGHT(kg)	Q'TY
1/2"	15A	108	51	89	60.3	16x4	34.9	1.6	11.2	9.5	15.7		2.0	
3/4"	20A	117	55	98	69.9	16x4	42.9	1.6	12.7	12	20.8		2.9	
1"	25A	127	65	108	79.4	16x4	50.8	1.6	14.2	17	26.7		3.8	
1 1/4"	32A	140	76	117	88.9	16x4	63.5	1.6	15.7	24	35.1		5.6	
1 1/2"	40A	165	84	127	98.4	16x4	73.0	1.6	17.5	29	40.9		7.1	
2"	50A	203	101	152	120.6	19x4	92.1	1.6	19.1	36	52.6		11.7	

NO.	DATE	DESCRIPTION	DRA.	CHK.	APP.
TITLE		CLASS 150 , A105/13CR LIFT CHECK VALVE , B.C, RF			
APP.	CHK.	DRA.	SCALE	NON	
S.J.BANG	J.Y.JANG	W.G.LEE	DATE	2025.07.01	
			DWG NO.	DEV-LC150-A105-RF	
 동은밸브(주) DONG EUN VALVE CO.,LTD. (구) 강강금속 DONG KANG METAL CO.,LTD.					