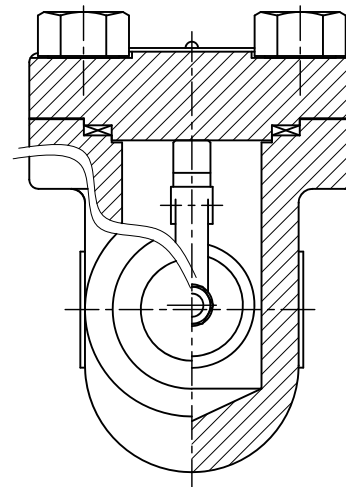


[illegible]

NOTE

1. VALVE DESIGN: API 602
2. END CONNECTION: ASME B16.11
3. HYDROSTATIC TEST (API 598)
Shell: 205 Bar
Seat: 150 Bar

DIMENSIONS (UNIT: mm)

SIZE		L	H	Ød	S	d1	ØB	C		WEIGHT(kg)	Q'TY		
1/2"	15A	73	51	10	13.6	1/2-14NPT	22.00	10		1.0			
3/4"	20A	87	55	13	13.9	3/4-14NPT	27.40	13		1.3			
1"	25A	96	65	19	17.3	1-11 1/2NPT	34.10	13		2.0			
1 1/4"	32A	121	76	25	18.0	1 1/4-11 1/2NPT	42.90	13		3.4			
1 1/2"	40A	141	84	30	18.4	1 1/2-11 1/2NPT	49.00	13		4.2			
2"	50A	161	101	37	19.2	2-11 1/2NPT	61.45	16		6.9			

NO.	DATE	DESCRIPTION	DRA.	CHK.	APP.
TITLE		CLASS 800 , A105/316 SWING CHECK VALVE , B.C,SWxNPT			
APP.	CHK.	DRA.	SCALE	NON	
S.J.BANG	J.Y.JANG	W.G.LEE	DATE	2025.07.01	
			DWG NO.	REF-8200-A105-SW1F5	
 동은밸브(주) DONG EUN VALVE CO.,LTD. (주) 대강 DONG KANG METAL CO.,LTD.					

PAINTING OR COATING	☒ PHOSPHATIZED ☐ NONE ☐ OTHER
---------------------------	---