


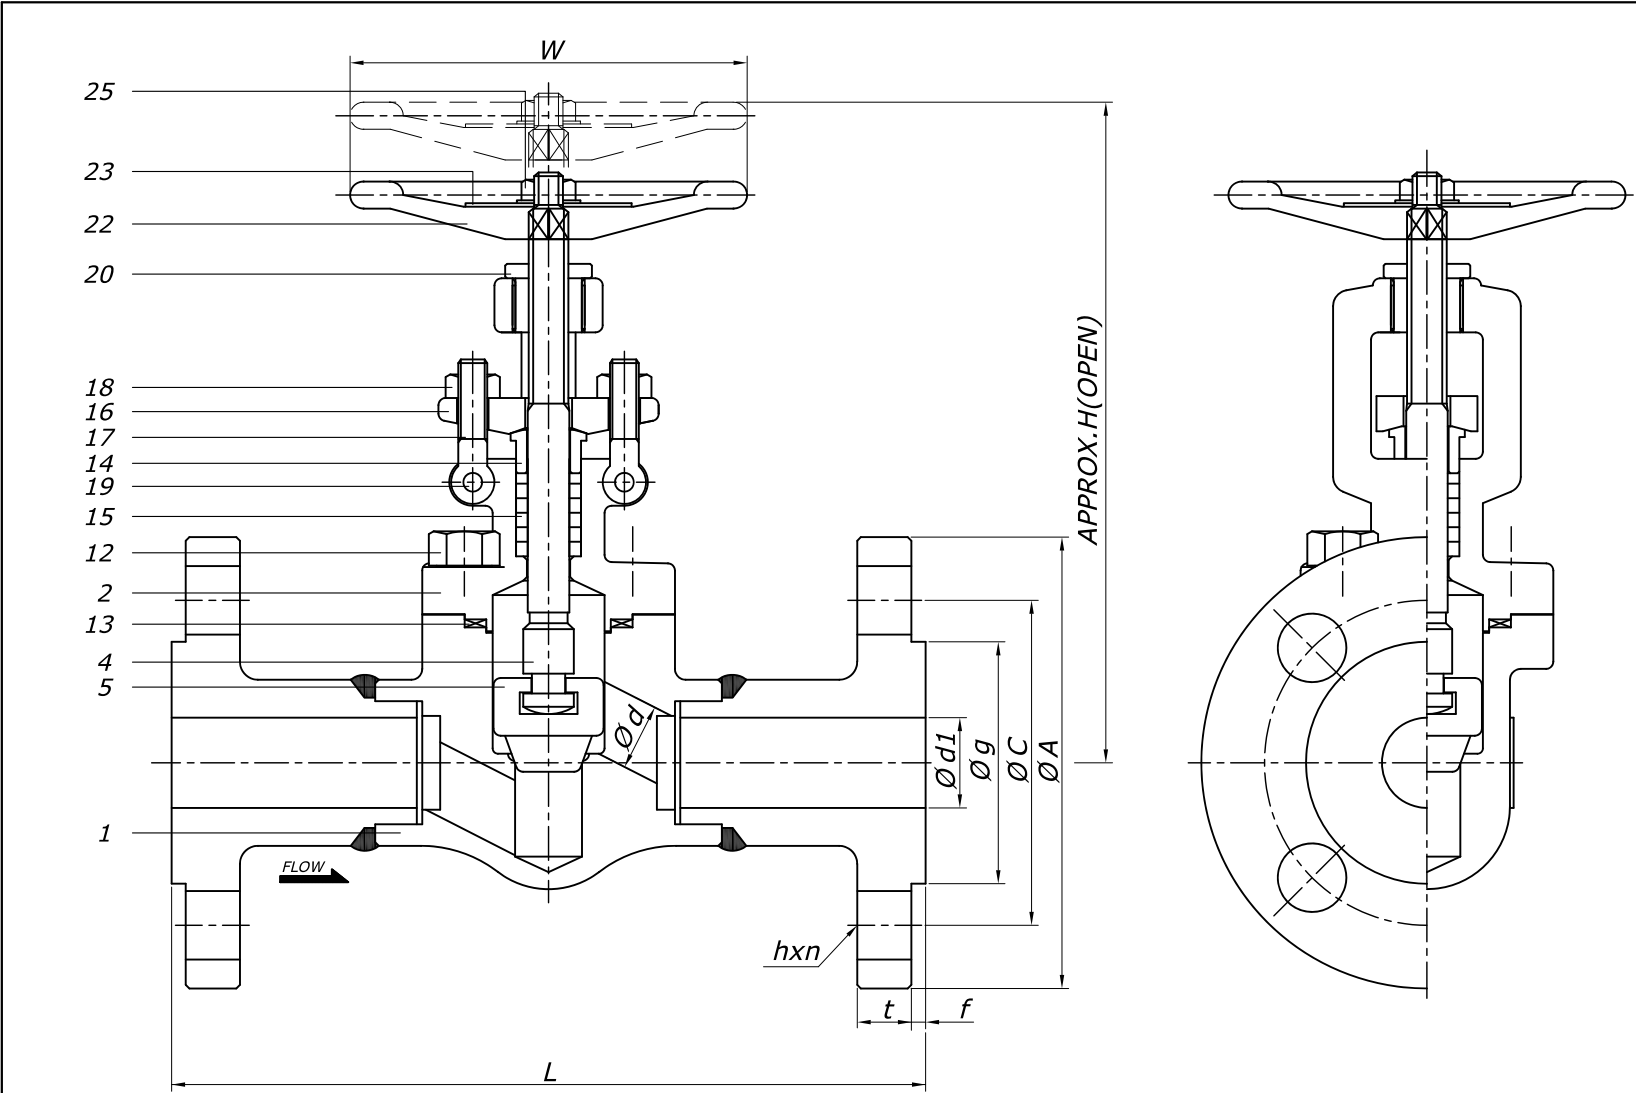

DIMENSIONS (UNIT: mm)

SIZE		L ±1.5	H	W	ØA	ØC	hxn	Øg	f	t	Ød	Ød1		WEIGHT(kg)	Q'TY
1/2"	15A	165	134	90	95	66.7	16x4	34.9	6.4	14.3	9.5	15.7		3.4	
3/4"	20A	190	146	90	117	82.5	19x4	42.9	6.4	15.9	12.5	20.8		5.0	
1"	25A	216	177	105	124	88.9	19x4	50.8	6.4	17.5	18.5	26.7		6.5	
1 1/4"	32A	229	205	125	133	98.4	19x4	63.5	6.4	20.7	24	35.1		10.0	
1 1/2"	40A	241	215	125	156	114.3	22x4	73.0	6.4	22.3	29	40.9		13.0	
2"	50A	292	248	150	165	127.0	19x8	92.1	6.4	25.4	36	52.6		18.7	

PAINTING
OR
COATING

☐ PHOSPHATIZED
☒ NONE
☐ OTHER

BILL OF MATERIALS				
NO.	PART NAME	MATERIAL	Q'TY	REMARK
1	Body	A182-F316	1	-
2	Bonnet	A182-F316	1	-
4	Stem	A276-316	1	-
5	Disc	A351-CF8M	1	-
12	Bonnet Bolt	A193-B8	4	or EQ
13	Gasket	316SS+GRAPHITE	1	-
14	Gland	A276-304	1	-
15	Gland Packing	GRAPHITE	1Set	-
16	Gland Flange	A182-F304	1	-
17	Gland Bolt	A193-B8	2	or EQ
18	Gland Bolt Nut	A194-8	2	or EQ
19	Gland Bolt Pin	A276-304	2	-
20	Sleeve	A276/A479-410	1	-
22	Hand Wheel	A197	1	-
23	Name Plate	ALUMINUM	1	-
25	Hand Wheel Nut	SS400	1	-
-	Seat(Integral)	STELLITE	1	-

NOTE

- 1.VALVE DESIGN: API 602
2.END CONNECTION: ASME B16.10,ASME B16.5
3.HYDROSTATIC TEST(API 598)
Shell:149 Bar
Seat:110 Bar

NO.	DATE	DESCRIPTION	DRA.	CHK.	APP.
TITLE		CLASS 600 , A182-F316/316 GLOBE VALVE , B.B, OS&Y , RF			
APP.	CHK.	DRA.	SCALE	NON	
S.J.BANG	J.Y.JANG	W.G.LEE	DATE	2025.07.01	
			DWG NO.	DEV-Q1600-F316-RF	

 **동은밸브(주)**
DONG EUN VALVE CO.,LTD.
(주)  DONG KANG METAL CO.,LTD.