


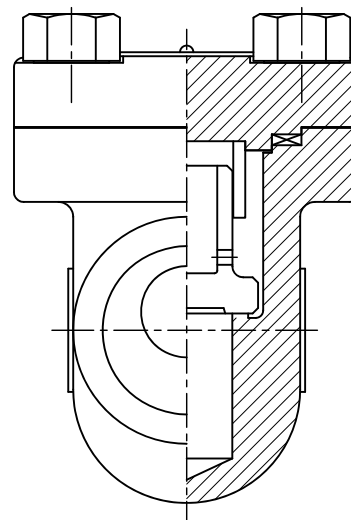

1. VALVE DESIGN: API 602
2. END CONNECTION: ASME B16.11
3. HYDROSTATIC TEST (API 598)
Shell: 383 Bar
Seat: 281 Bar

 **동은밸브(주)**
DONG EUN VALVE CO., LTD.

SIZE		L	H	Ød	S	d1	ØB	C		WEIGHT(kg)	Q'TY	PAINTING OR COATING ☒ PHOSPHATIZED ☐ NONE ☐ OTHER	NO. DATE DESCRIPTION DRA. CHK. APP.						
1/2"	15A	96	65	10	13.6	1/2-14NPT	22.00	10		2.0			TITLE CLASS 1500 , A105/13CR LIFT CHECK VALVE , B.C,SWxNPT						
3/4"	20A	96	65	12	13.9	3/4-14NPT	27.40	13		2.0			APP. CHK. DRA. SCALE NON						
1"	25A	121	76	17	17.3	1-11 1/2NPT	34.10	13		3.4			S.J.BANG J.Y.JANG W.G.LEE DATE 2025.07.01						
1 1/4"	32A	141	84	24	18.0	1 1/4-11 1/2NPT	42.90	13		4.2			DWG NO. REF-CLASS-A105-SWPT						
1 1/2"	40A	161	101	29	18.4	1 1/2-11 1/2NPT	49.00	13		6.9			 동은밸브(주) DONG EUN VALVE CO.,LTD. (주) 대강 대강 DONG KANG METAL CO.,LTD.						
2"	50A	172	116	37	19.2	2-11 1/2NPT	61.45	16		8.9									