


[illegible]

1. VALVE DESIGN: API 602
2. END CONNECTION: ASME B16.11
3. HYDROSTATIC TEST (API 598)
Shell: 205 Bar
Seat: 150 Bar

NO.	DATE	DESCRIPTION	DRA.	CHK.	APP.
TITLE		CLASS 800 , A105/304 LIFT CHECK VALVE , B.C,NPT			
APP.	CHK.	DRA.	SCALE	NON	
S.J.BANG	J.Y.JANG	W.G.LEE	DATE	2025.07.01	
			DWG NO.	DEY-C000-A105-NPT2	

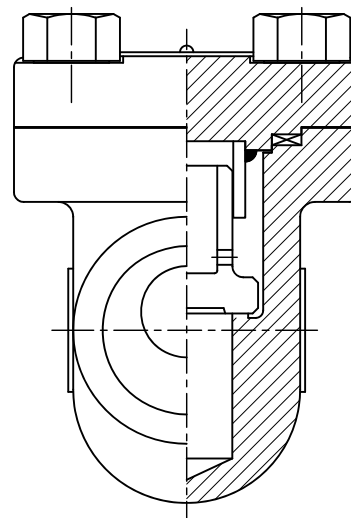

DIMENSIONS (UNIT: mm)

SIZE		L	H	Ød	S	d1	WEIGHT(kg)	Q'TY		
1/2"	15A	87	55	12	13.6	1/2-14NPT	1.3			
3/4"	20A	87	55	12	13.9	3/4-14NPT	1.3			
1"	25A	96	65	17	17.3	1-11 1/2NPT	2.0			
1 1/4"	32A	121	76	24	18.0	1 1/4-11 1/2NPT	3.4			
1 1/2"	40A	141	84	29	18.4	1 1/2-11 1/2NPT	4.2			
2"	50A	161	101	36	19.2	2-11 1/2NPT	6.9			

NO.	DATE	DESCRIPTION	DRA.	CHK.	APP.
TITLE		CLASS 800 , A105/304 LIFT CHECK VALVE , B.C.,NPT			
APP.		CHK.	DRA.	SCALE	NON
S.J.BANG		J.Y.JANG	W.G.LEE	DATE	2025.07.01
				DWG NO.	DEP-LC800-A105-NPT2
동은밸브(주) DONG EUN VALVE CO.,LTD. (주) 대강 DONG KANG METAL CO.,LTD.					