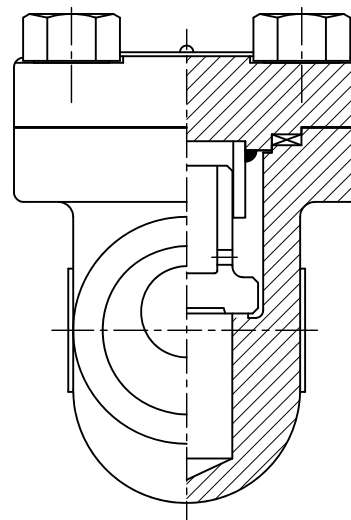


[illegible]

1. VALVE DESIGN: API 602
2. END CONNECTION: ASME B16.11
3. HYDROSTATIC TEST (API 598)
Shell: 205 Bar
Seat: 150 Bar

SIZE		L	H	Ød	S	d1	WEIGHT(kg)	Q'TY		
1/2"	15A	87	55	12	13.6	1/2-14NPT	1.3			
3/4"	20A	87	55	12	13.9	3/4-14NPT	1.3			
1"	25A	96	65	17	17.3	1-11 1/2NPT	2.0			
1 1/4"	32A	121	76	24	18.0	1 1/4-11 1/2NPT	3.4			
1 1/2"	40A	141	84	29	18.4	1 1/2-11 1/2NPT	4.2			
2"	50A	161	101	36	19.2	2-11 1/2NPT	6.9			

PAINTING OR COATING

☒ PHOSPHATIZED
☐ NONE
☐ OTHER

NO.

DATE

DESCRIPTION

DRA.

CHK.

APP.

TITLE

CLASS 800 , A105/13CR

LIFT CHECK VALVE , B.C.,NPT

APP.

CHK.

DRA.

SCALE

NON

S.J.BANG

J.Y.JANG

W.G.LEE

DATE

2025.07.01

DWG NO.

DEP-LC800-A105-NPT



동은밸브(주)

DONG EUN VALVE CO.,LTD.

(주) 동강

DONG KANG METAL CO.,LTD.