


[illegible]

1. VALVE DESIGN: API 602
2. END CONNECTION: ASME B16.11
3. HYDROSTATIC TEST (API 598)
Shell: 373 Bar
Seat: 273 Bar

NO.	DATE	DESCRIPTION	DRA.	CHK.	APP.
TITLE		<i>CLASS 1500 , A182-F304/304 LIFT CHECK VALVE , B.C,SWxNPT</i>			
APP.		CHK.	DRA.	SCALE	NON
S.J.BANG	J.Y.JANG	W.G.LEE	DATE	2025.07.01	
			DWG NO.	REF-AC150-F304-SWNP	

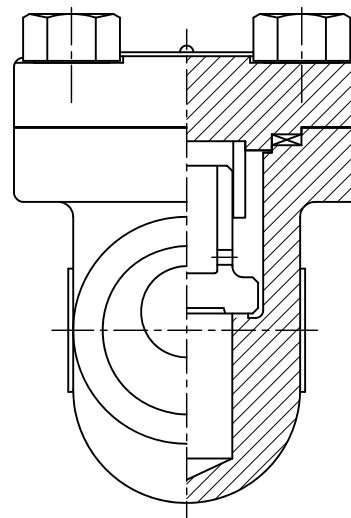

DIMENSIONS (UNIT: mm)

SIZE		L	H	Ød	S	d1	ØB	C		WEIGHT(kg)	Q'TY	PAINTING OR COATING ☐ PHOSPHATIZED ☒ NONE ☐ OTHER	NO. DATE DESCRIPTION DRA. CHK. APP. TITLE CLASS 1500 , A182-F304/304 LIFT CHECK VALVE , B.C,SWxNPT APP. CHK. DRA. SCALE NON S.J.BANG J.Y.JANG W.G.LEE DATE 2025.07.01 DWG NO. DEP-1500-F304-SWPT 동은밸브(주) DONG EUN VALVE CO.,LTD. (주)대강 DONG KANG METAL CO.,LTD.
1/2"	15A	96	65	10	13.6	1/2-14NPT	22.00	10		2.0			
3/4"	20A	96	65	12	13.9	3/4-14NPT	27.40	13		2.0			
1"	25A	121	76	17	17.3	1-11 1/2NPT	34.10	13		3.4			
1 1/4"	32A	141	84	24	18.0	1 1/4-11 1/2NPT	42.90	13		4.2			
1 1/2"	40A	161	101	29	18.4	1 1/2-11 1/2NPT	49.00	13		6.9			
2"	50A	172	116	37	19.2	2-11 1/2NPT	61.45	16		8.9			