


[illegible]

1.VALVE DESIGN: API 602
2.END CONNECTION: ASME B16.11
3.HYDROSTATIC TEST(API 598)
Shell:199 Bar
Seat:146 Bar

NO.	DATE	DESCRIPTION	DRA.	CHK.	APP.
TITLE		CLASS 800 , A182-F316/316 LIFT CHECK VALVE , B.C,SWxNPT			
APP.	CHK.	DRA.	SCALE	NON	
S.J.BANG	J.Y.JANG	W.G.LEE	DATE	2025.07.01	
			DWG NO.	REV-0000-F316-SMPT	

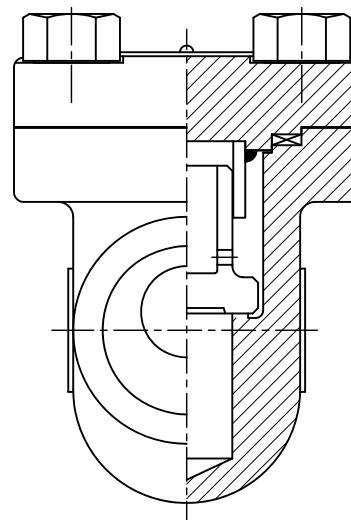

DIMENSIONS (UNIT: mm)

SIZE		L	H	Ød	S	d1	ØB	C		WEIGHT(kg)	Q'TY	PAINTING OR COATING ☐ PHOSPHATIZED ☒ NONE ☐ OTHER
1/2"	15A	87	55	12	13.6	1/2-14NPT	22.00	10		1.3		
3/4"	20A	87	55	12	13.9	3/4-14NPT	27.40	13		1.3		
1"	25A	96	65	17	17.3	1-11 1/2NPT	34.10	13		2.0		
1 1/4"	32A	121	76	24	18.0	1 1/4-11 1/2NPT	42.90	13		3.4		
1 1/2"	40A	141	84	29	18.4	1 1/2-11 1/2NPT	49.00	13		4.2		
2"	50A	161	101	36	19.2	2-11 1/2NPT	61.45	16		6.9		
NO. DATE DESCRIPTION DRA. CHK. APP. TITLE CLASS 800 , A182-F316/316 LIFT CHECK VALVE , B.C,SWxNPT APP. CHK. DRA. SCALE NON S.J.BANG J.Y.JANG W.G.LEE DATE 2025.07.01 DWG NO. REV-1000-F316-SWPT  동은밸브(주) DONG EUN VALVE CO.,LTD. (주) 동강 DONG KANG METAL CO.,LTD.												